

Polycom Soundstation IP Phone Setup with Tpad




Plug the network cable from Internet connection and plug it into the Polycom LAN port and turn it on.

To locate the Polycom's IP Address, press MENU > STATUS > NETWORK > TCP/IP PARAMETERS.

2. Open a web browser on your PC and type the Polycoms IP address in the address field:

e.g. <http://192.168.2.2>

3. This will present you with the configuration web page for the phone

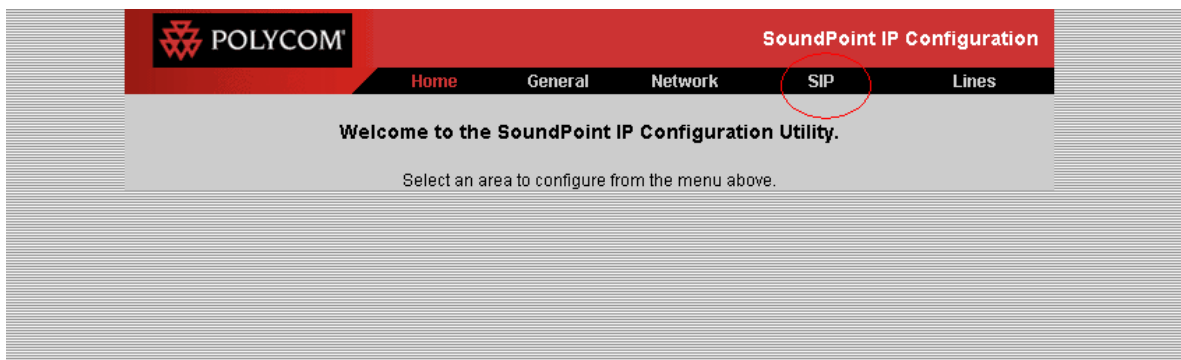

4. Click on **SIP**.

This will ask for your username and password: The default admin username is **Polycom** and the default admin password is **456**


5. Enter the **Outbound proxy** and **Server 1** values as follows:

The screenshot shows the Polycom SoundPoint IP Configuration web interface. The top navigation bar includes the Polycom logo and the title "SoundPoint IP Configuration". Below the navigation bar, there are tabs for "Home", "General", "Network", "SIP", and "Lines". The "SIP" tab is selected. Below the tabs, there is a section titled "SIP Configuration Parameters:" with two sub-sections: "Servers" and "Local Settings". The "Servers" sub-section is expanded, showing a table of configuration parameters for "Server 1".

Servers	
Outbound Proxy	
Address	sip.tpad.com
Port	5060
DNS Lookup	DNSnaptr
Server 1	
Address	sip.tpad.com
Port	5060
DNS Lookup	DNSnaptr
Expires	3600
Register	1
Retry Time Out	0
Retry Max Count	0
Line Seize Time Out	30

Press the "**Submit**" button and it will save the settings and reboot the phone.

When the phone has rebooted, click on **Lines**.

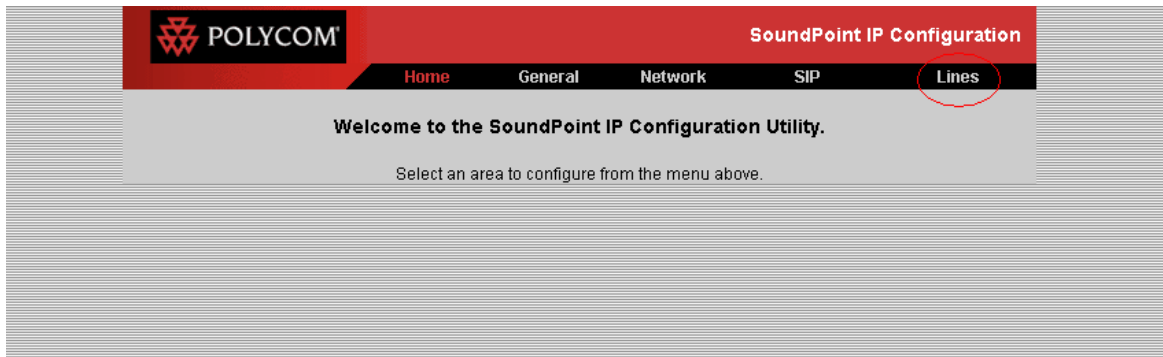

Enter the following values in the **Identification section**:

Display Name: Your Tpad Number e.g. 1123444

Address: Your Tpad Number@sip.tpad.com

e.g. 1123444@sip.tpad.com

Auth User ID: Your Tpad Number e.g. 1123444

Auth Password: Your Tpad account Password

Label: Your Tpad Number e.g.1123444

Line Parameters:	
Line 1	Line 2
Line 1	
Identification	
Display Name	1123444
Address	1123444@sip.tpad.com
Auth User ID	1123444
Auth Password	••••••
Label	1123444
Type	<input checked="" type="radio"/> Private <input type="radio"/> Shared
Third Party Name	
Num Line Keys	
Calls Per Line Key	
ACD Login Logout	0
ACD Agent Available	0
Ring Type	2

Press the **"Submit"** button and it will save the settings and reboot the unit.

Your phone will now register your Tpad account and is ready to use.